

FIG. 1A


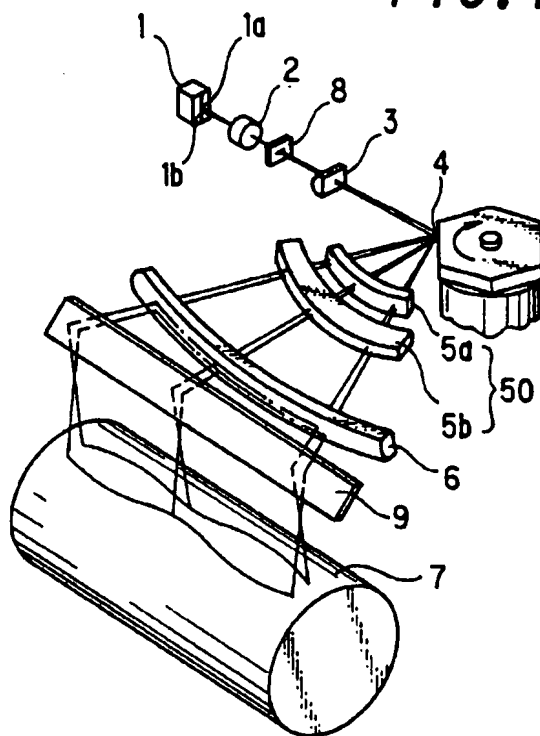


FIG. 1B

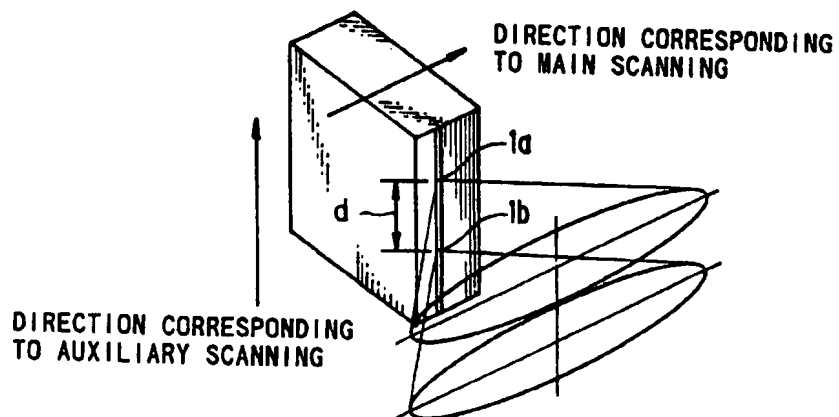

09421332 101899

658 FOT 2EE F2460

FIG. 2A

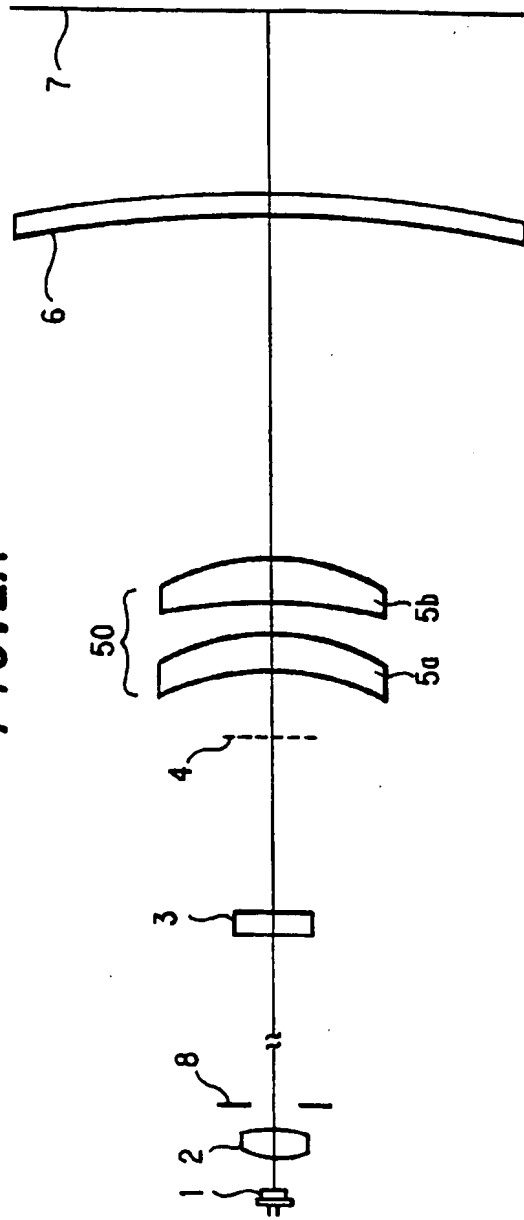


FIG. 2B

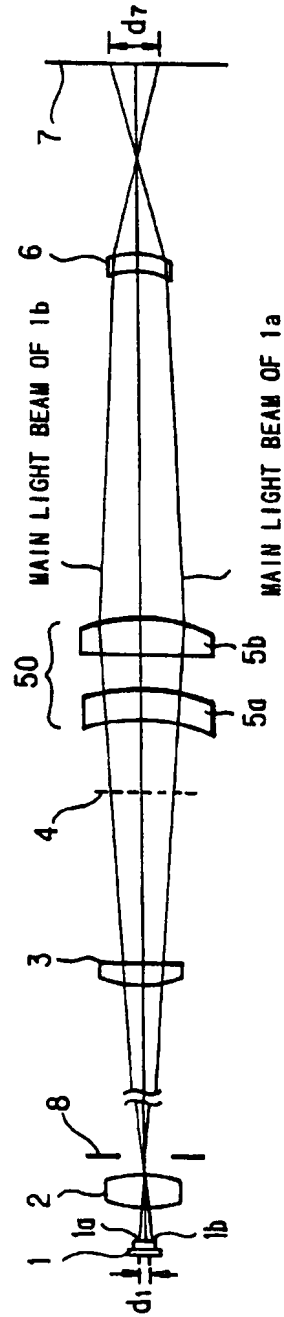


FIG. 3


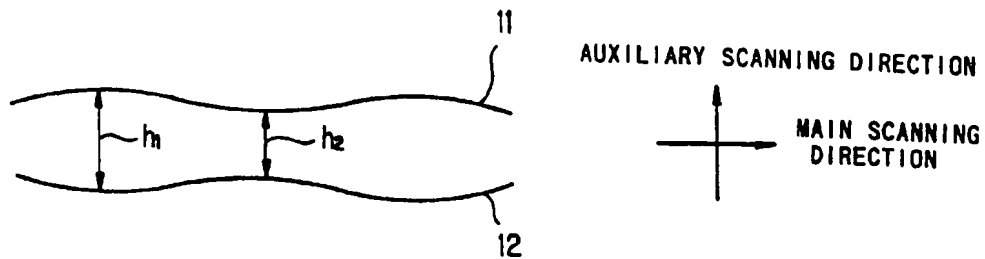


FIG. 4

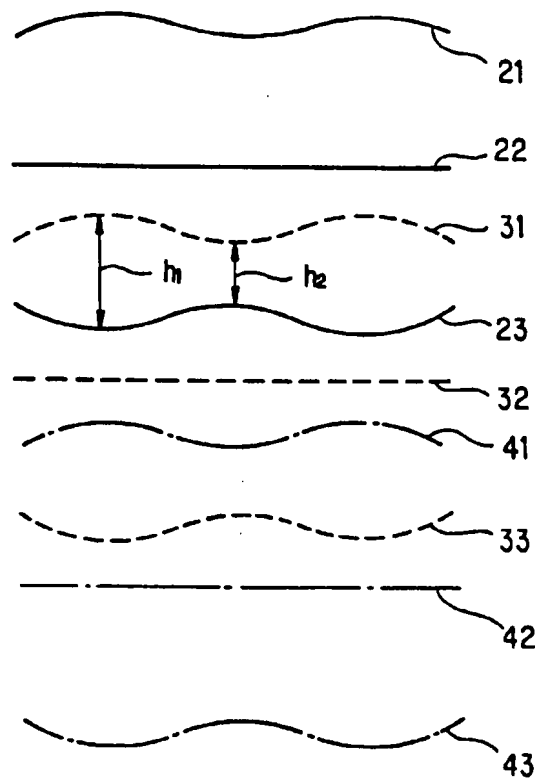

09421332-101899

**THE UNIVERSITY OF CHICAGO**




Figure 1 is a schematic diagram of a laser beam measurement system. A laser source 500 emits a beam through a lens 45. The beam is reflected by a mirror 30 and focused by a lens 41 onto a detector 42. The distance between the lens 41 and the detector 42 is labeled  $\Delta Z$ .






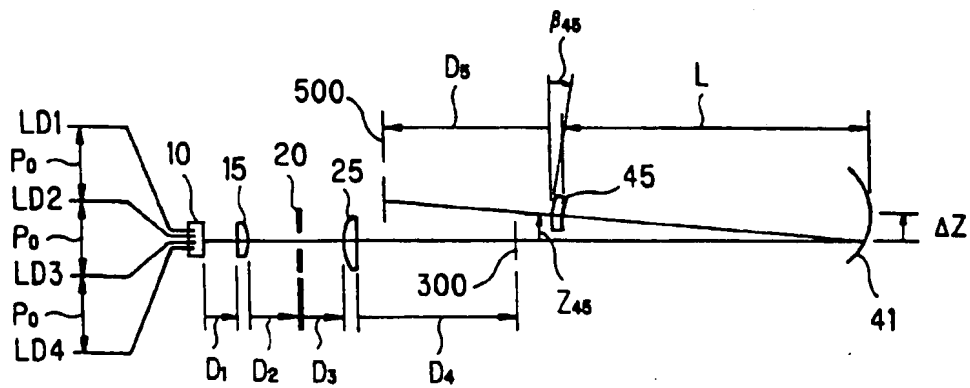
[illegible]

FIG. 7

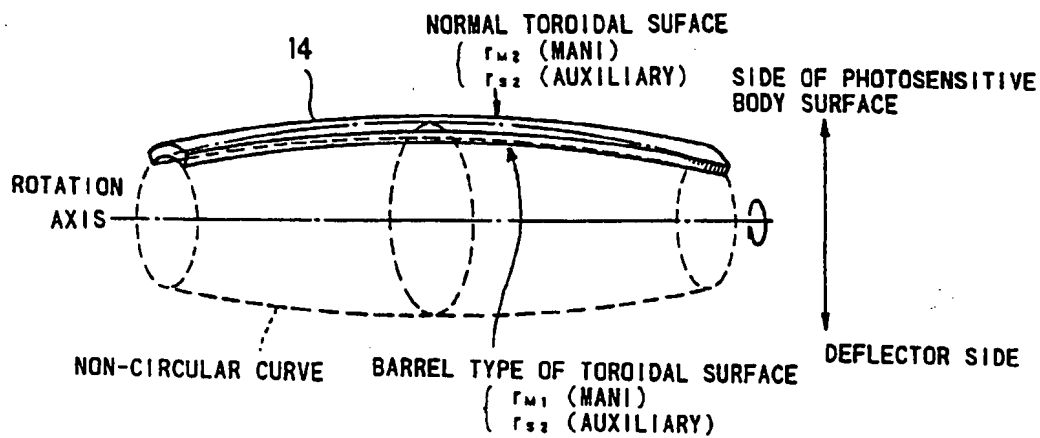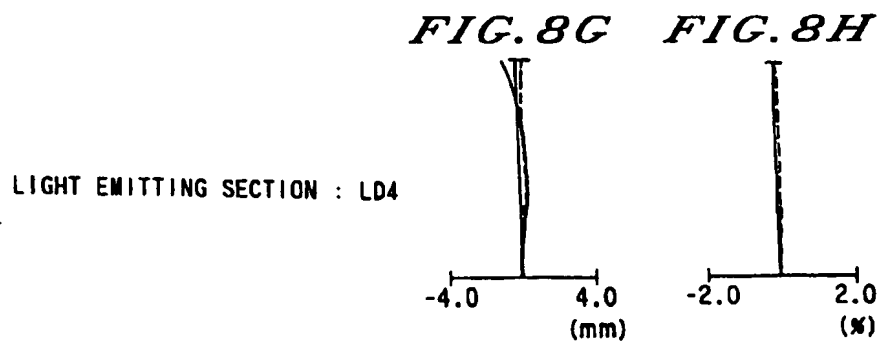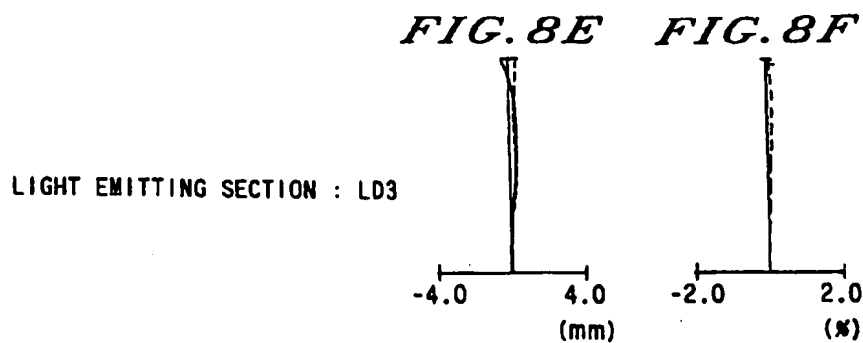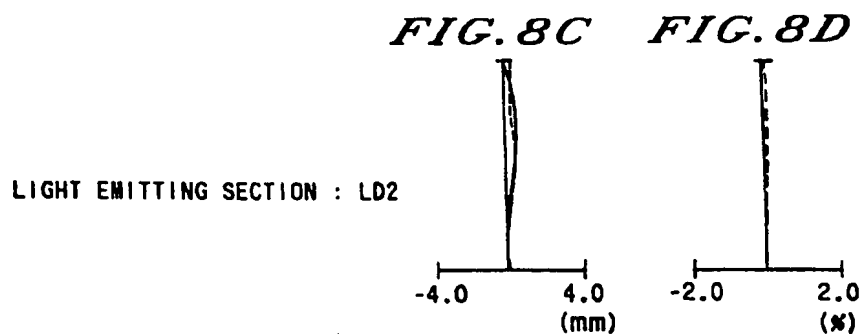

09421332-101899

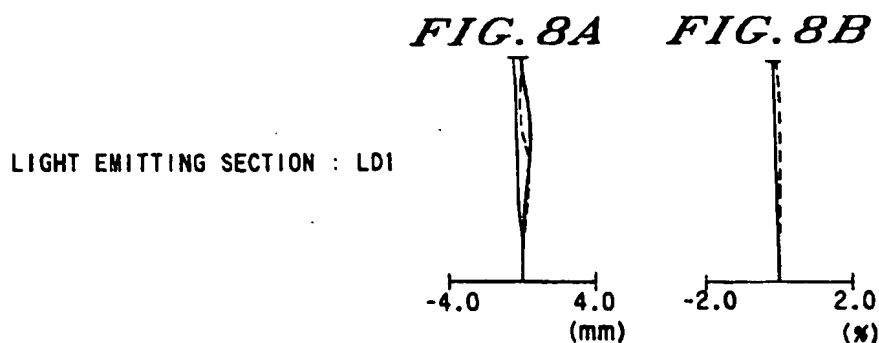

CURVE OF IMAGE SURFACE  
(W = 40°)

CONSTANT-VELOCITY  
PERFORMANCE  
(W = 40°)

66307 2222460

FIG. 9

